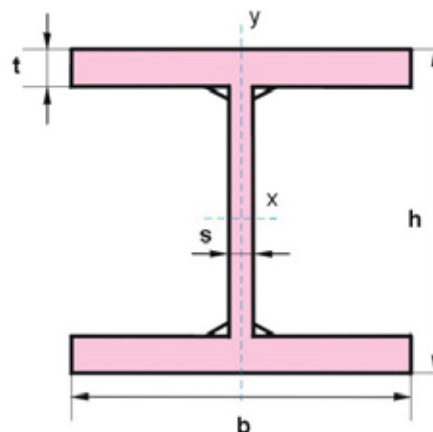


Nosník HKS

(svařovaný nosník)


NORMY:

BN-76/0647-01/03

TECHNICKÉ PARAMETRY

Typ nosníku H K S	Rozměry				Max. délka m	Průřez cm ²	Hmotnost 1 m kg
	h	b	s	t			
	mm						
HKS 300	300	300	8 - 10	14 - 24	10 - 12	105,8-169,2	84,6-135,4
HKS 340	340	340	8 - 10	14 - 24	10 - 12	120,2-192,4	96,1-153,9
HKS 360	360	360	8 - 12	15 - 28	10 - 12	141,0-238,1	112,8-190,5
HKS 400	400	400	8 - 12	15 - 28	9 - 12	157,0-265,3	125,6-212,2
HKS 450	450	450	8 - 12	15 - 30	9 - 12	177,0-316,8	141,6-253,4
HKS 500	500	500	8 - 12	15 - 30	9 - 12	197,0-352,8	157,6-282,2
HKS 550	550	550	8 - 12	15 - 30	9 - 12	217,0-388,8	173,6-311,0