


Kolejnice

NORMY:
viz tabulka

TDP:
PN, AREA, ABNT, DIN, UIC,
GOST, BS

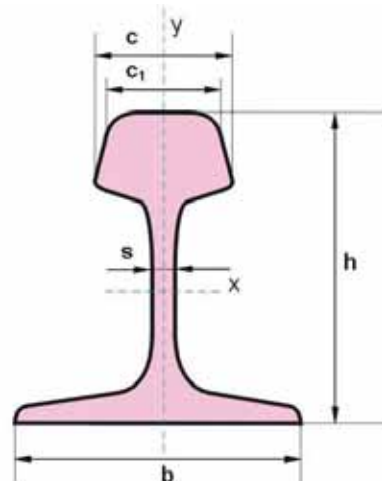

TECHNICKÉ PARAMETRY

Typ kolejnice	Rozměry					Průřez cm ²	Hmotnost 1 m kg	Statické param.		Normy
	h	c	c ₁	b	s			I _x	W _x	
	mm									
S 10 = 70/10	70	32	-	58	6	12,8	10	85,7	24,4	ČSN 425676
S 14 = 80/14	80	38	-	70	9	17,83	14	154	36,9	ČSN 425676
S 18 = 93/18	93	43	-	82	10	23,3	18,3	278	58,1	ČSN, PN, DIN
S 20 = 100/20	100	44	-	82	10	25,2	19,8	346	66,8	ČSN, PN, DIN
S 24 = 115/24	115	53	-	90	10	31	24,4	569	98	ČSN, PN, DIN
S 30	120	55	55	110	11	-	-	-	-	PN
S 30	108	60,3	60,3	108	12,3	-	30,03	-	-	DIN
S 39	134	65,53	62,48	117,5	13,1	-	-	-	-	PN, DIN
S 49	149	70	66,84	125	14	62,97	49,43	1815	241	PN-84/H-93421 DIN 5901
S 54	154	70	67	125	16	69,48	54,54	2073	262	DIN 5902
UIC 54	159	72,2	70	140	16	69,34	54,43	2346	279,2	UIC 861-1
UIC 60	172,1	74,3	72	150	16,5	76,86	60,34	3055	335,5	PN-84/H-93421 UIC 861-3
UIC 54 A	159	72,3	70	140	28	83,22	65,33	2517	291,5	UIC 861-2
TR 45/90 RA-A	142,9	65,1	61,5	130,2	14,3	56,9	44,64	1610	205,6	ABNT/AREA
TR 57/115 RE	168,3	69,1	69,06	139,7	15,9	72,58	56,9	2730	295	ABNT/AREA
TR 68/136 RE	185,7	74,61	72,62	152,4	17,5	86,12	67,56	3950	391,5	ABNT/AREA
P 50	152	72	-	132	16	65,99	51,67	2011	285	GOST 7174-75
P 65	180	75	73	150	18	82,65	64,72	3540	435	GOST 8161-75
80 A	133,4	63,5	-	117,5	13,1	50,65	39,76	1204	177,46	BS 11-1985
Čína 50	152	70	-	132	15,5	65,8	51,51	2037	287,2	Podmínky čínských kolejnic
Čína 60	176	73	-	150	16,5	77,45	60,64	3217	339,4	Podmínky čínských kolejnic
IRS 52	156	67	-	136	15,5	66,1	51,89	2105	260,2	Podmínky indických kolejnic